

Re- Quotation Notice

Competitive quotations are invited from interested vendors within Kerala for Supply and Installation of CCTV at the premises of the University of Kerala Study and Research Centre, Alappuzha.


(Specifications appended)

Conditions

1. The rate quoted should be inclusive of Tax, transportation charges, installation charges and any other charges.
2. Complaints with the items supplied should be rectified/replaced to the satisfaction of the University by the suppliers at their own cost.
3. Payment will be made only after the supply and installation of the items at our site.
4. The undersigned reserves the right to reject/accept any quotation without assigning any reason.

The sealed quotations should be addressed to the undersigned superscribing as **“Quotation for Supply and Installation of CCTV at the premises of the University Study and Research Centre, Alappuzha”**. The last date of receipt of quotations is at 3:00 p.m. on 12.06.2025 . The quotations will be opened at 3:30 p.m. on the same day in the presence of the vendors, then present.

REGISTRAR

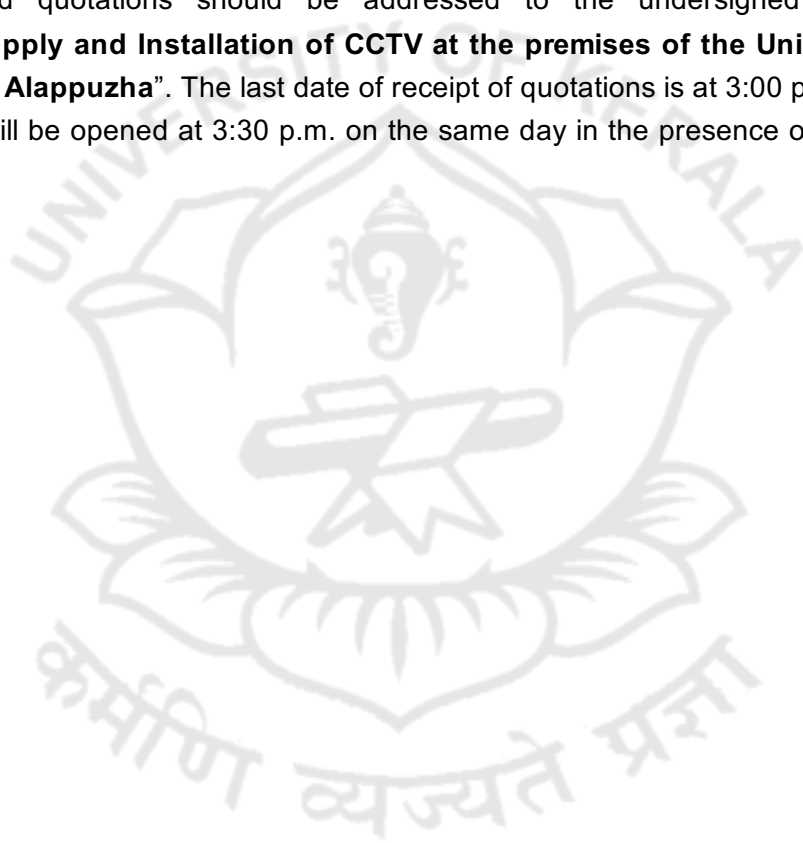

Supply and Installation of CCTV in the premises of the UKSRC, Alappuzha

Materials

Sl. No.	Item	Qty	Unit	Amount	GST %	GST amount	Amount including GST
1	4 Channel NVR (Honeywell/CP Plus/Hikvision/Dahua)	1	No.				
2	Surveillance HDD - 2 TB or (Seagate/Western Digital equivalent)	1	No.				
3	2 MP Network Bullet IR Camera (Honeywell/CP PLUS/Hikvision/Dahua)	2	Nos.				
4	Cat6 UTP Cable (Molex/AMP/NORDEN)	60	Mtr.				
5	Singleshutter faceplate	2	Nos.				
6	3/3 SMB (box)	2	Nos.				
7	RJ 45 Connectors	4	Nos.				
8	20 mm White ISI PVC Casing and Capping with accessories	50	Mtr.				
9	4 port 10/100 Mbps Ethernet PoE Switch with 1 year warranty	1	No.				
10	2U wall mount Network rack with accessories (Netrack/Rittal/Dlink or equivalent)	1	Nos.				
11	18.5" LED Monitor with wall mount Stand(Lenovo/Samsung/LG)	1	No.				

Labour



12	Fixing and configuration of 4 Channel NVR with HDD	1	No.				
13	Fixing of Bullet Camera	2	Nos.				
14	Cat6 UTP Laying Charges	60	Mtr.				
15	RJ 45 / IO Termination Charges	4	Nos.				
16	Faceplate Fixing Charges	2	Nos.				
17	3/3 PVC Box fixing Charges	2	Nos.				
18	Laying Charges of 20mm PVC Pipe and make good the damages.	90	Mtr.				
19	Fixing and configuration of Ethernet Switch	1	No.				
20	Fixing and dressing of wall mount Network rack	1	Nos.				
21	Installation of 18.5" LED Monitor with wall mount stand	1	No.				
22	Testing, Commissioning and Labelling	1	No.				
23	Unforeseen Items	1	No.				
Total							

Annexure -I - Technical Specifications

Supply and Installation of CCTV in the premises of the UKSRC, Alappuzha				
Materials				
Sl. No.	Item	Qty	Unit	Make/ Model



1	4 Channel NVR (Honeywell/CP Plus/Hikvision/Dahua)	1	No.	
2	Surveillance HDD - 2 TB (Seagate/Western Digital or equivalent)	1	No.	
3	2 MP Network Bullet IR Camera (Honeywell/CP PLUS/Hikvision/Dahua)	2	Nos.	
4	Cat6 UTP Cable (Molex/AMP/NORDEN)	60	Mtr.	
5	Singleshutter faceplate	2	Nos.	
6	3/3 SMB (box)	2	Nos.	
7	RJ 45 Connectors	4	Nos.	
8	20 mm White ISI PVC Casing and Capping with accessories	50	Mtr.	
9	4 port 10/100 Mbps Ethernet PoE Switch with 1 year warranty	1	No.	
10	2U wall mount Network rack with accessories (Netrack/Rittal/Dlink or equivalent)	1	Nos.	
11	18.5" LED Monitor with wall mount Stand(Lenovo/Samsung/LG)	1	No.	

The Guarantee of the items shall be specified in the quotation.

