

Quotation Notice

Competitive quotations are invited from interested vendors within Kerala towards Supply and Installation of CCTV in the Syndicate room, corridors of the office of the Vice-Chancellor and Pro Vice-Chancellor's Office.

1.	Name of work /Items	Supply and Installation of CCTV System in the Syndicate room and corridors of Vice Chancellor's Office and PVC's Office- SH Campus, Palayam
2.	Quotation No.	Ad B II/01/ 2451 /2025
3.	Period of Completion	45 Days
4.	Last Date of receipt of quotation	24.09.2025 , 3.00 pm
5.	Date and time of Opening quotation	24.09.2025 , 3.30 pm
6.	Contact details for Technical Clarification	Instrumentation Engineer, CLIF, Kariavattom Campus, University of Kerala. Ph:2308566

Specifications appended as Annexure A**Terms and Conditions**

1. The vendor shall quote price in clear terms. The rates quoted must be inclusive of all taxes, cost of supply at site, warranty and installation charges etc. The price should be quoted only in Indian rupees.
2. Intending vendors should send their quotations so as to reach the officer mentioned in the quotation notice, on or before the due date and time noted therein. No quotation received after the specified date and time will be accepted on any account.
3. The quotations will be opened on the appointed day and time in the office of the Registrar, in the presence of such of those vendors or their nominees who may be present at that time.
4. Complaints with the items supplied should be rectified/replaced to the satisfaction of the University by the suppliers at their own cost.
5. The vendors shall undertake to supply materials according to the specifications (appended as Annexure A)
6. No representation for enhancement of rates once accepted will be considered.
7. Validity: - The Bid will be valid for 90 days from its date of opening. Further extension can be done by mutual consent.
8. Delivery :- The item should be delivered at the SH Campus, Palayam.
9. Installation and Commissioning: - The items shall be installed and commissioned in the Syndicate room and corridors of Vice Chancellor's Office and PVC's Office- SH Campus



Palayam.


Period of Completion:- The work shall be completed within a period 45 days from date of issue of supply order.

10. Payment: - The University will release the payment only after inspecting the work and satisfy that the items are supplied as per the requirements and on the basis of actual quantity executed. The payment will be made after successful completion of the supply on producing invoice in triplicate. The final bill shall be based on the actual quantity of supply made.
11. Warranty/Guarantee: The guarantee/ warranty of the items shall be specified in the quotation. Corresponding model of items SI.No:1& 2 should have a OEM warranty period of 3 years".The supplier shall guarantee to repair/replace the items or its part -if found defective within the warranty (Defect Liability) period mentioned in Specification/ estimate.
12. Attach the STQC ER Certificate for the corresponding model of items SI.No:1& 2.
13. In case of dispute arises, the decision of University authority shall be final.
14. The undersigned reserves the right to reject or accept any or all the quotations received fully or partly without assigning any reason thereof.
15. General rules relating to purchase of materials/equipment mentioned in store purchase manual will be also applicable to this quotation.

The quotations should be addressed to the **Registrar, University of Kerala, Senate House Campus, Palayam, Thiruvananthapuram-695034** in a sealed cover with the tender number and name - **Supply and Installation of CCTV System in the Syndicate room and corridors of Vice Chancellor's Office and PVC's Office- SH Campus, Palayam** duly superscribed on the cover.

03.09.2025

REGISTRAR

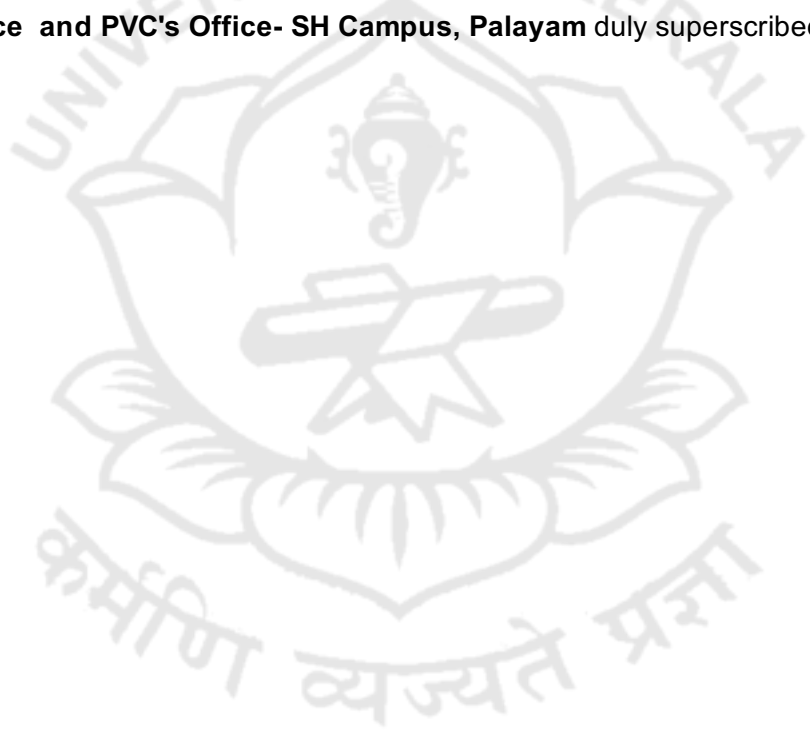

Annexure -1

SL. No.	Item	Make/Model	Qty	Unit	Rate	Total Rate	GST	Total Amount including GST
Passive/Active Components								
1	8 Channel Professional Rack mountable Network Video Recorder with 8 Channel IP Camera input Instastream, H.265, H.264, MJPEG Up to 12 MP resolution preview and playback Incoming bandwidth: 160 Mbps, ONVIF protocol, Should Support 2 SATA interface up to 20 TB or better for 1 HDD, 2 USB ports(2.0) HDMI / VGA simultaneous video output The Item should comply STQC (certification).		1	No.				
2	4 MP or better Fixed IP, IR Bullet Camera 1/2.9" CMOS Image Sensor, 4MP (2688 × 1520)@1-25/30fps/ (2560 × 1440)@1-25/30, Instastream, H.265, H.264, H.264H, H.264B, MJPEG, Support WDR (120dB), Day/Night, 3D NR, ROI, AWB, AGC, BLC, HLC, IR Range of 30 Mtr., Warm Light Range of 30 Mtr. 3.6mm fixed Lens, Support Built-in Mic, PoE, IP67 The Item should comply STQC (certification).		5	Nos.				
3	10-Port Gigabit Smart Switch with 8-Port PoE+ Preferred Make: HP/Netgear/TP-Link/Allied Telesis		1	No.				
4	Camera Housing suitable for item no. 2		7	Nos.				
5	Surveillance HDD for minimum 30 days backup- 4 TB or better		1	Nos.				



	Preferred Make: Seagate/ Western Digital							
6	1 KVA UPS (Double battery backup for minimum 20minutes) with suitable wall mount stand (light weight preferred)		1	No.				
7	Cat6 UTP Cable (Molex/Panduit/ Commscope)		200	Mtr				
8	Singles shutter faceplate		7	Nos.				
9	3/3 SMB (Camera box)		7	Nos.				
10	RJ 45 Connectors with Strain Relief Boot		14	Nos.				
11	25mm White ISI PVC Pipe with accessories		20	Mtr.				
12	HDMI Cable of 10 Mtr length		1	No.				
13	USB Extension Cable of 5 Mtr length		1	No.				
Labour								
14	Fixing and configuratuion of 8 CH NVR		1	No.				
15	Fixing and configuration of bullet camera		5	Nos.				
16	Cat6 UTP Laying Charges (Through existing conduit)		180	Mtr.				
17	Cat6 UTP Laying Charges		20	Mtr.				
18	RJ 45 / IO Termination Charges		14	Nos.				
19	3/3 PVC Box including faceplate fixing Charges		7	Nos.				



20	20mm/25mm/32mm PVC Pipe Laying Charges through surface		20	Mtr.				
21	Dismantling and Fixing of Wall mountable network rack		1	No.				
22	Fixing of PoE+ Gigabit Ethernet switch		1	Nos.				
23	Installation of 1 KVA UPS		1	No.				
24	Dismantling of cables & cameras		1	LS				
25	Wiring Electrical point (With 2 switches and two 6A plug Point) if necessary.		1	No.				
26	Testing, Commissioning and Labeling		1	No.				
Total								

Signature
Name of the firm

